

FIG. 1

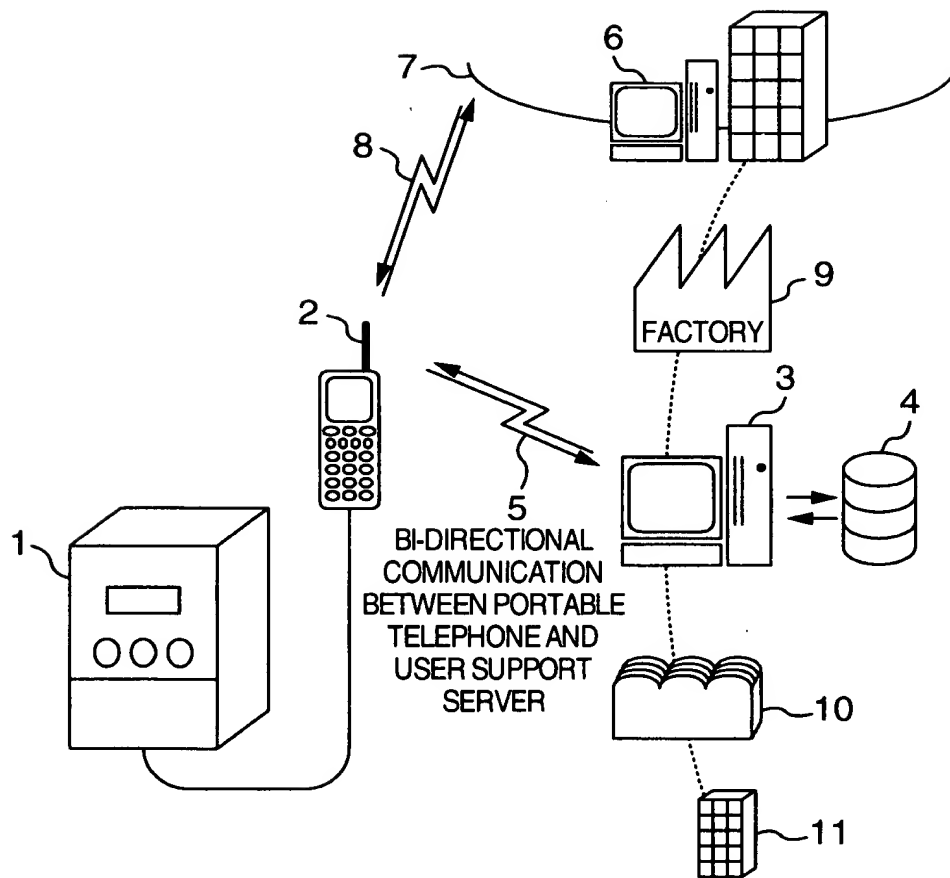


FIG. 2

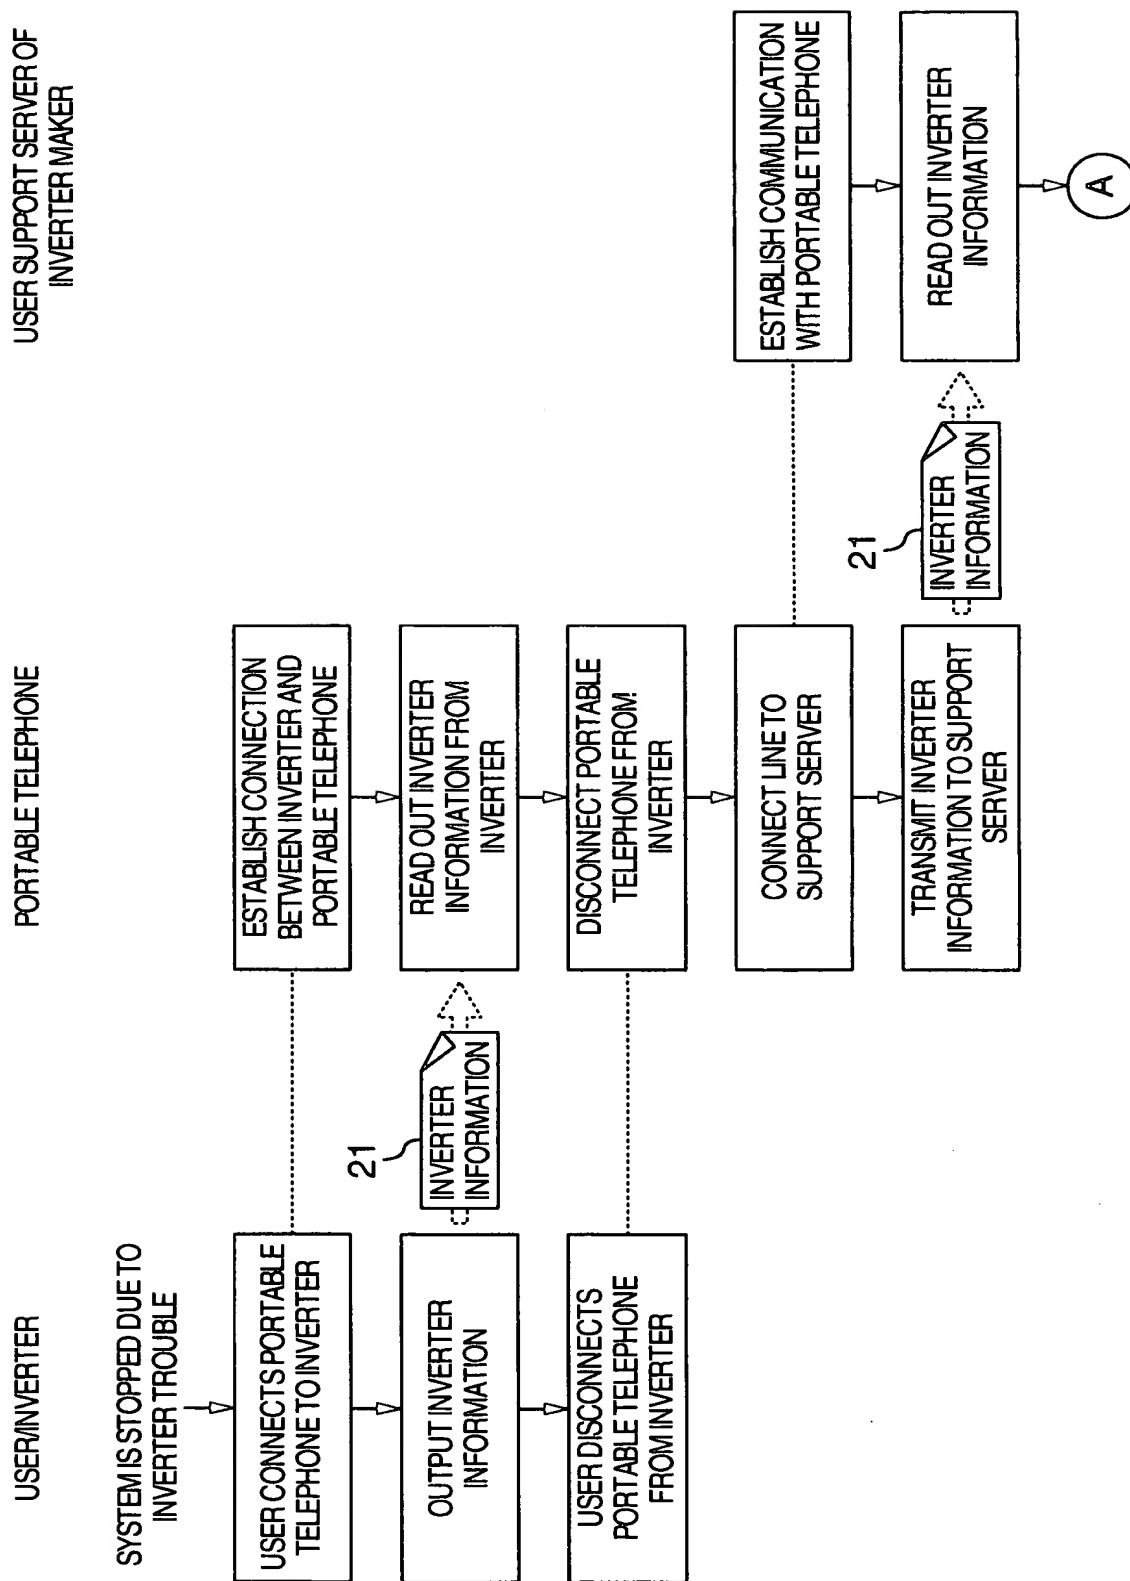


FIG. 3

PORTABLE TELEPHONE

USER SUPPORT SERVER OF  
INVERTER MAKER


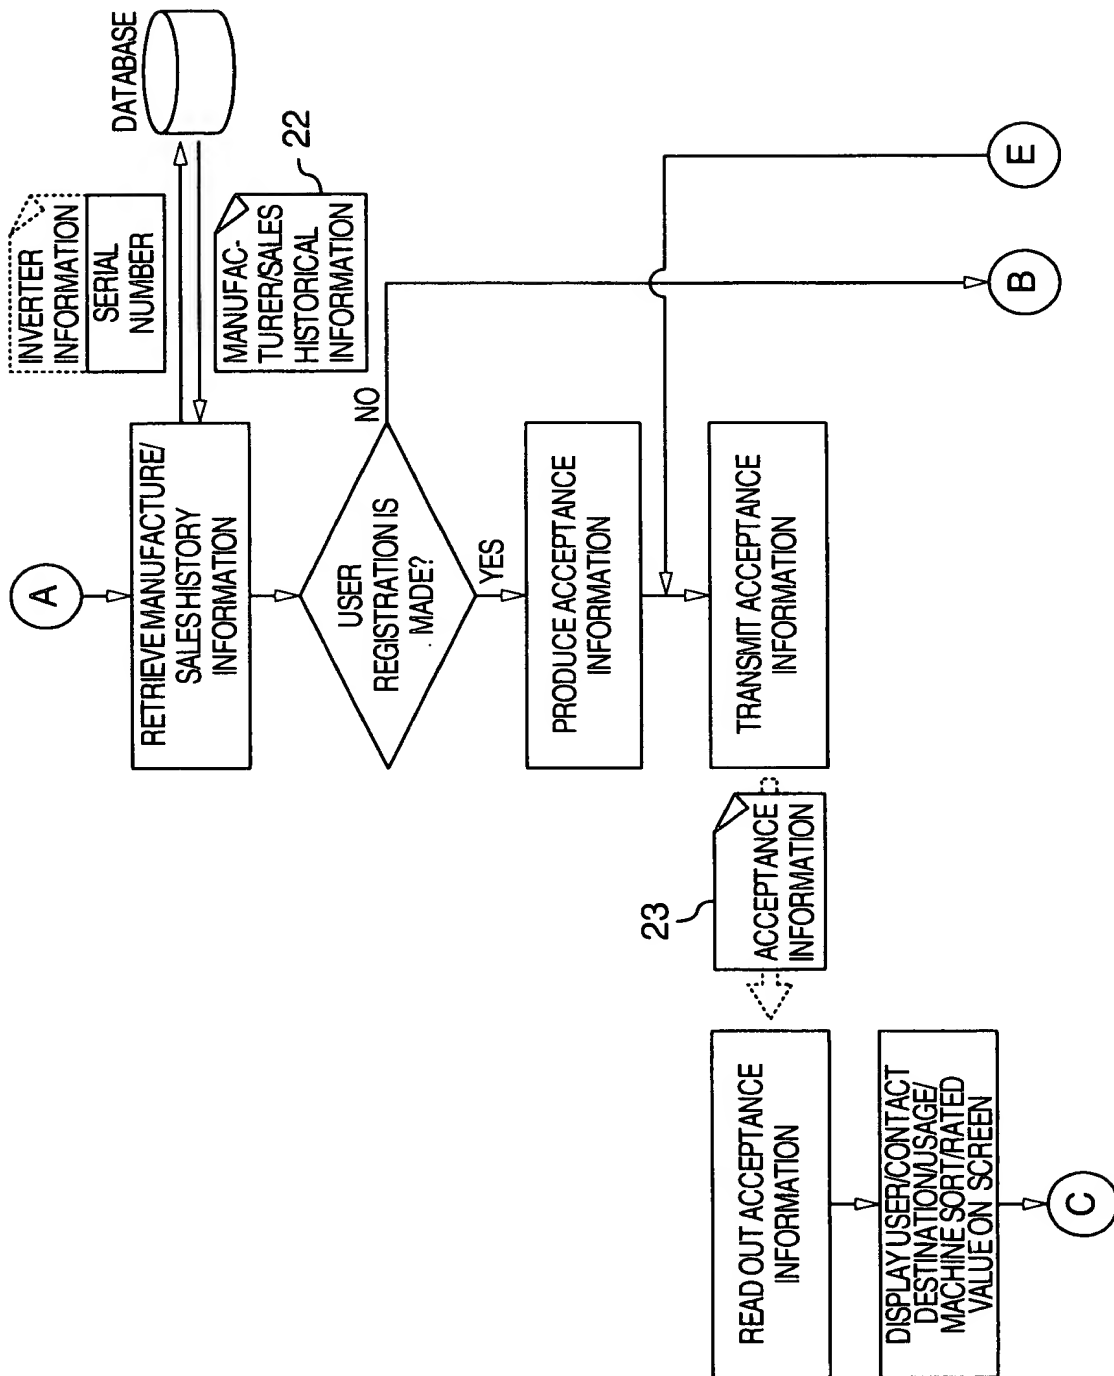


FIG. 4

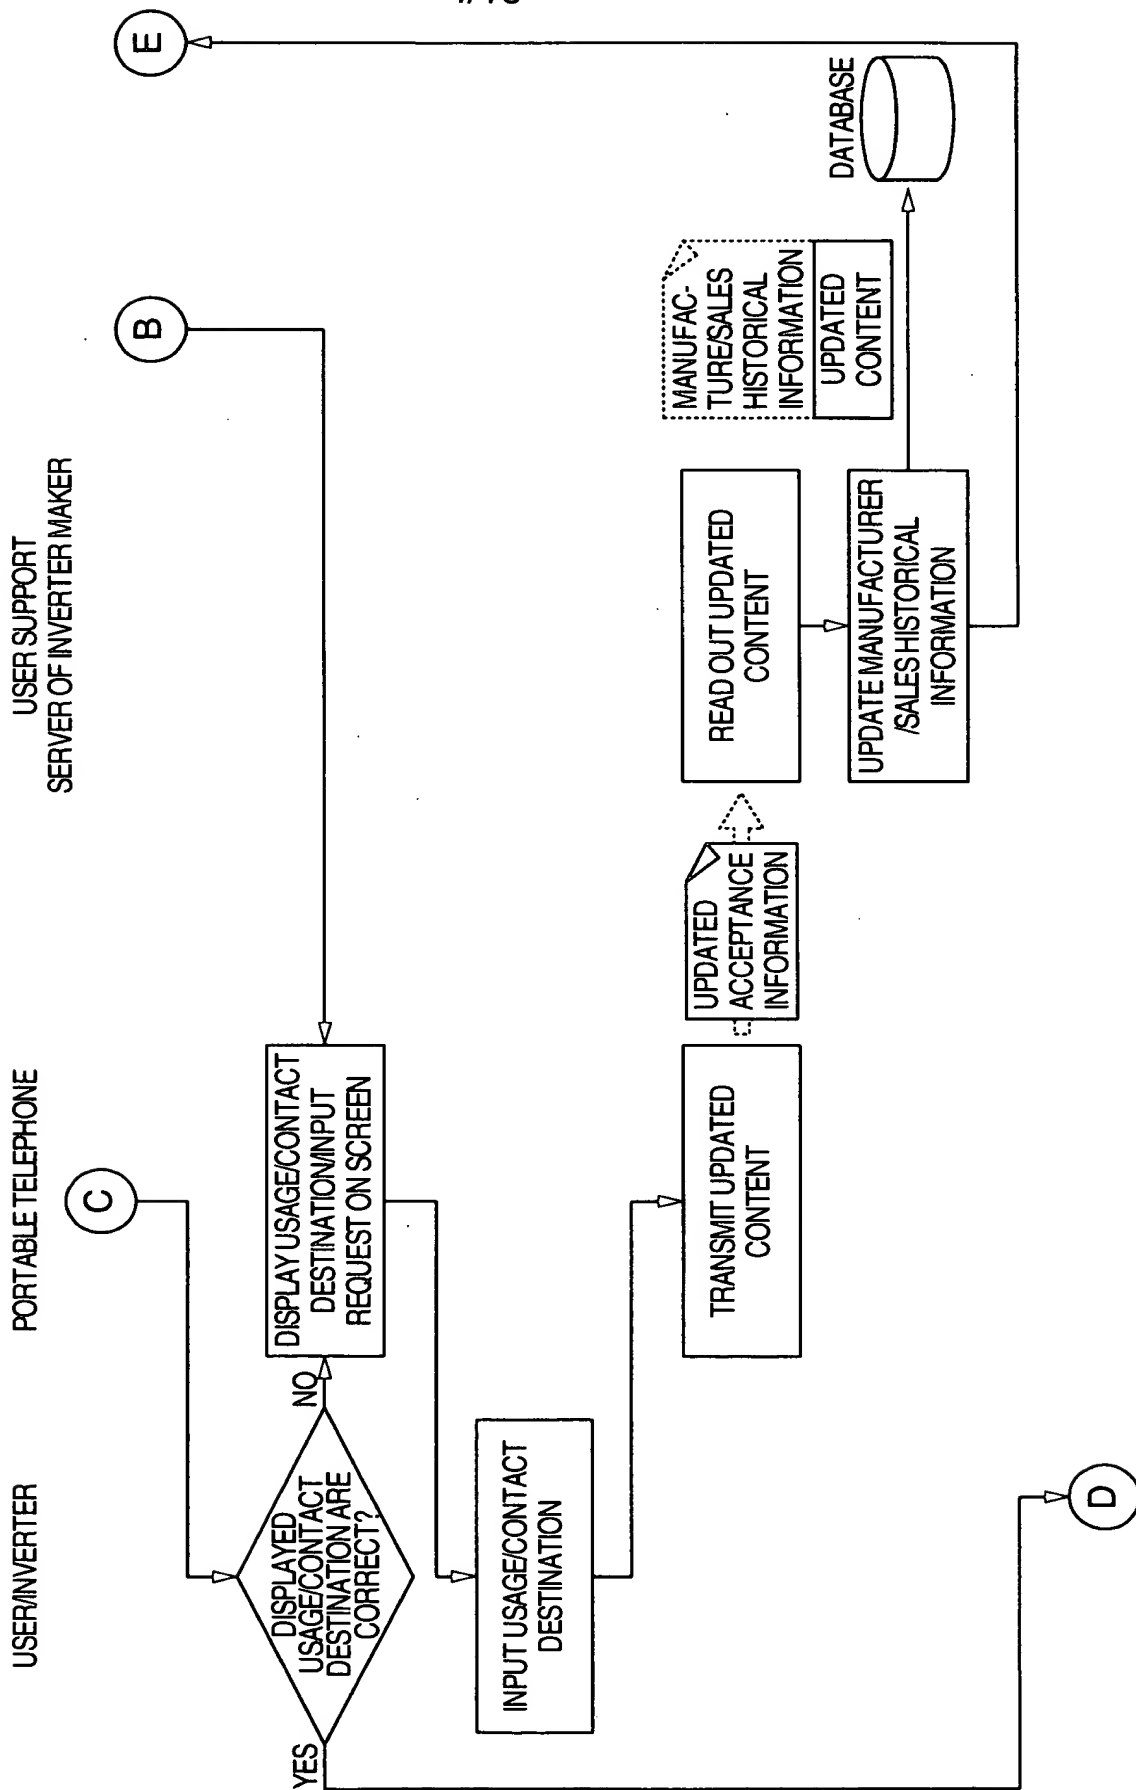

PORTABLE TELEPHONE

USER SUPPORT SERVER OF  
INVERTER MAKER

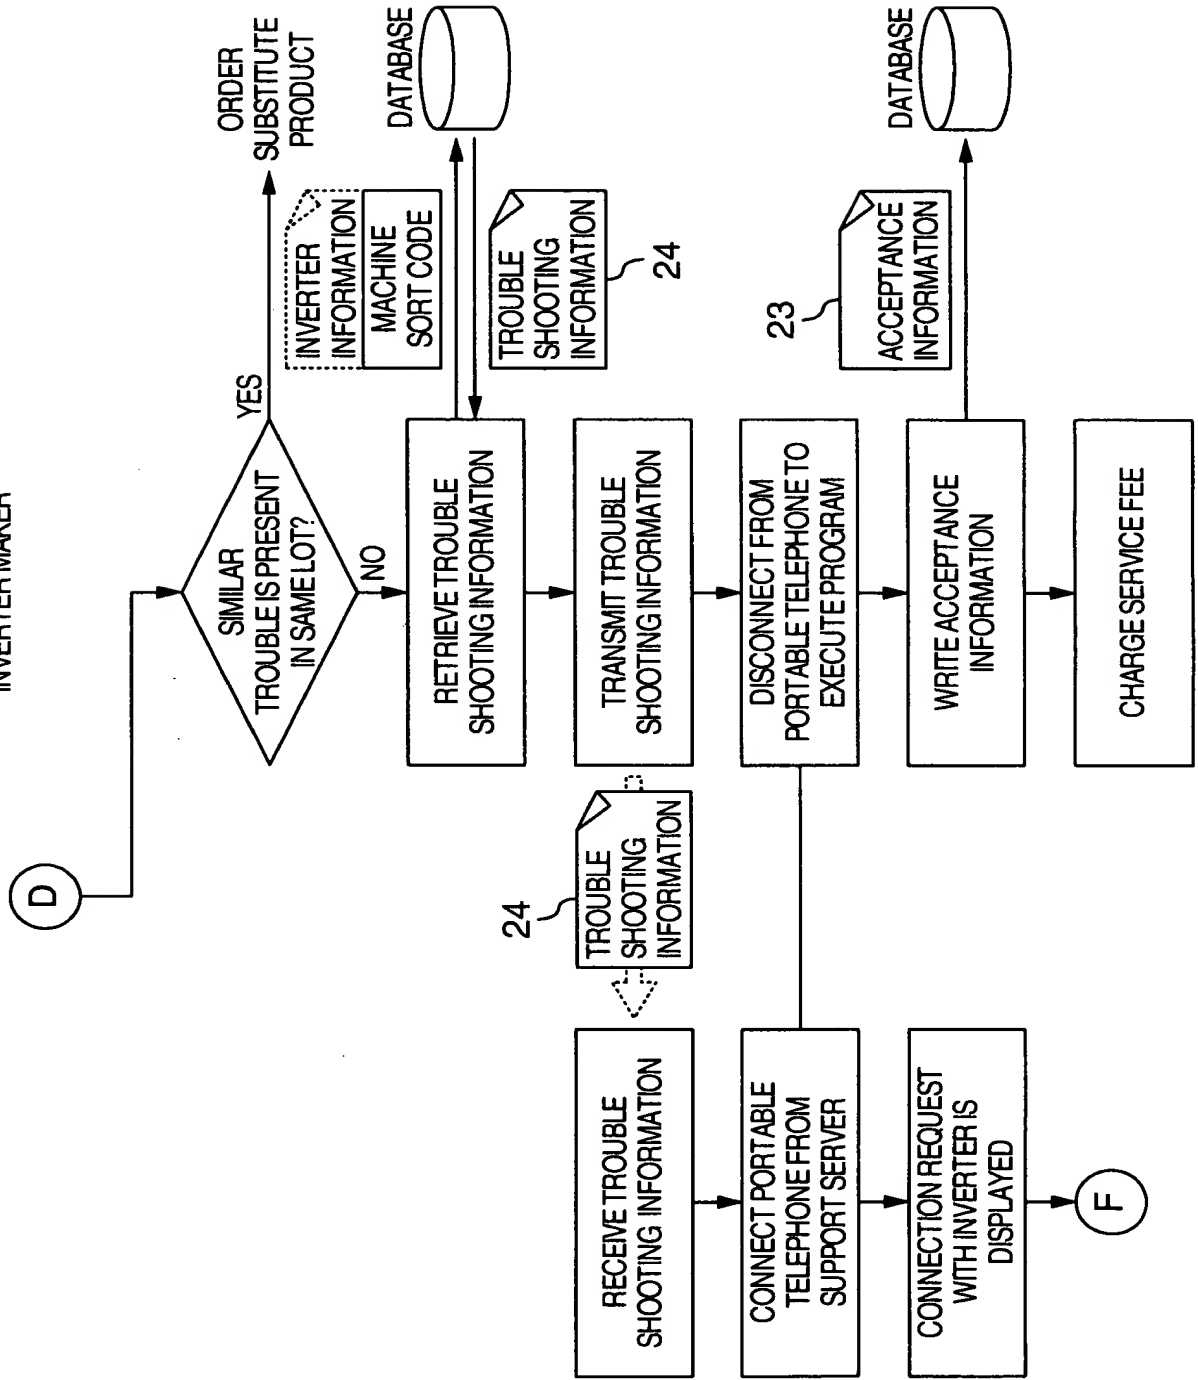


FIG. 6

USER/INVERTER

PORTABLE TELEPHONE

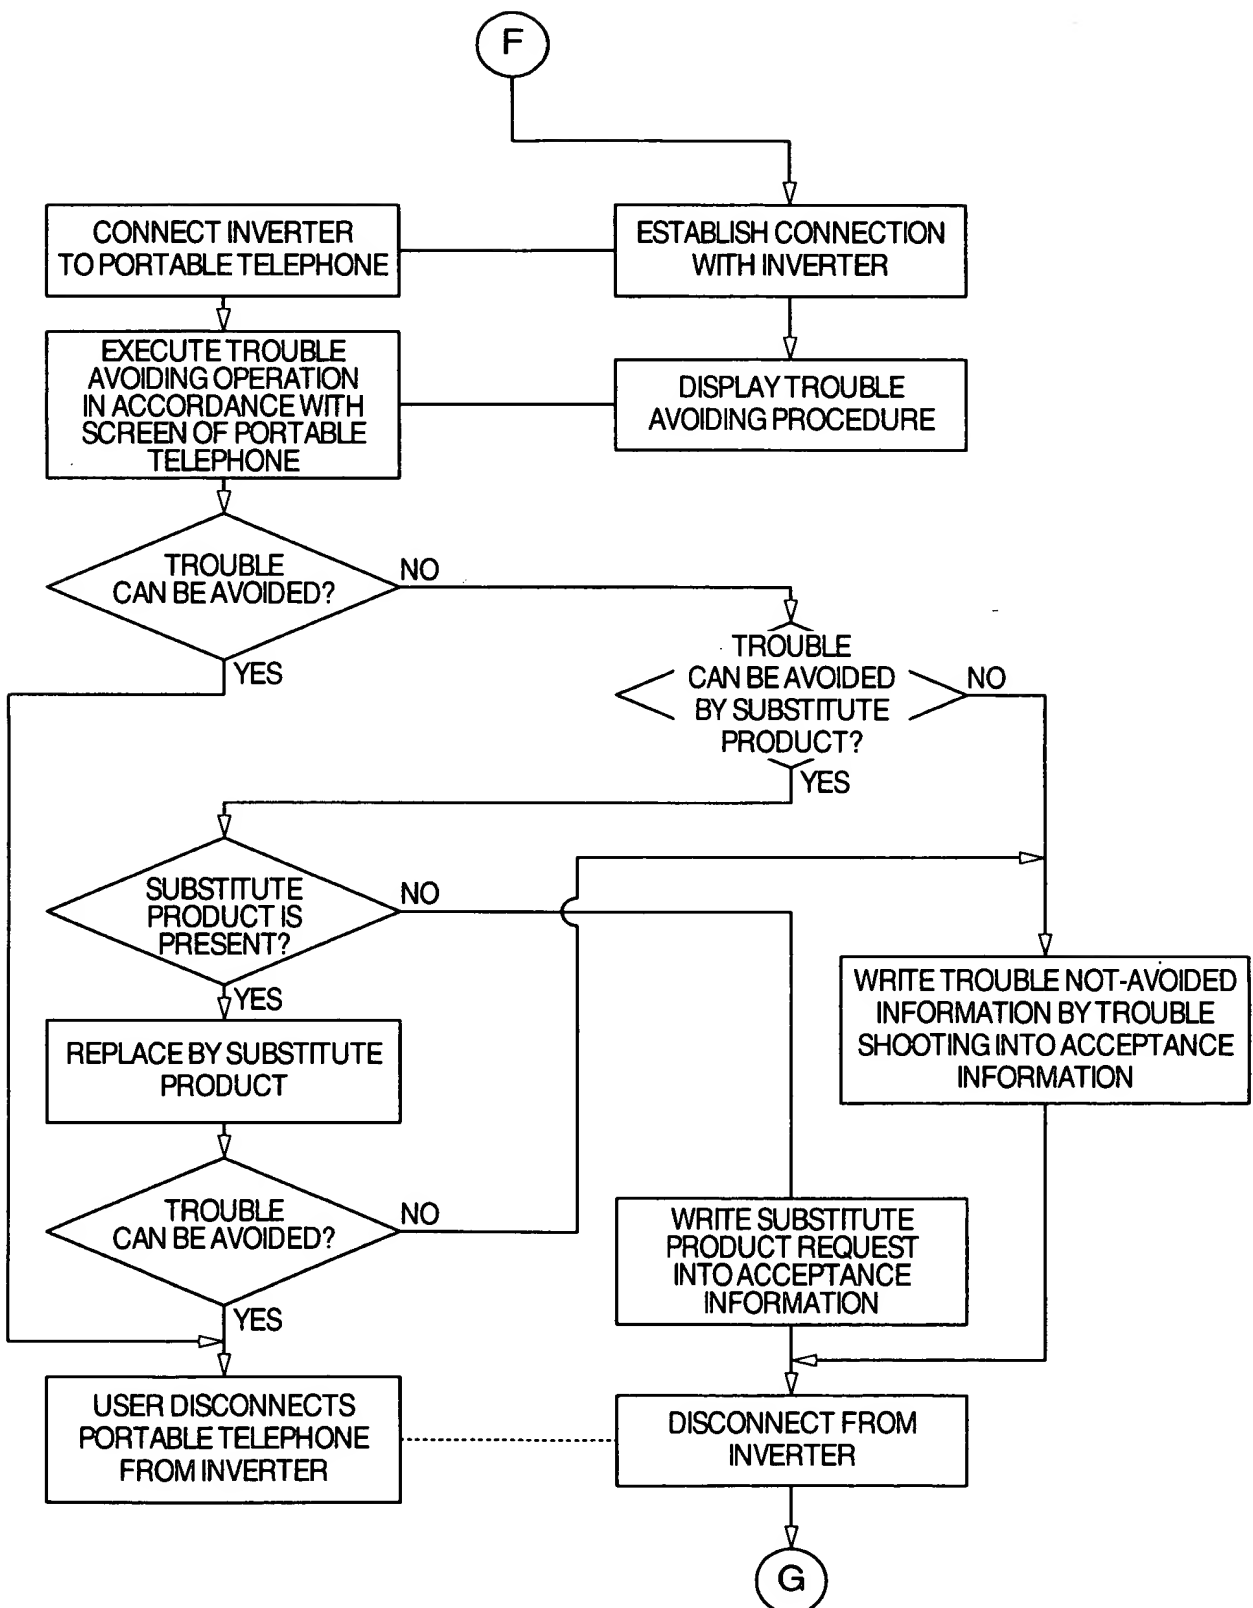


FIG. 6

FIG. 7 PORTABLE TELEPHONE

USER SUPPORT SERVER OF  
INVERTER MAKER


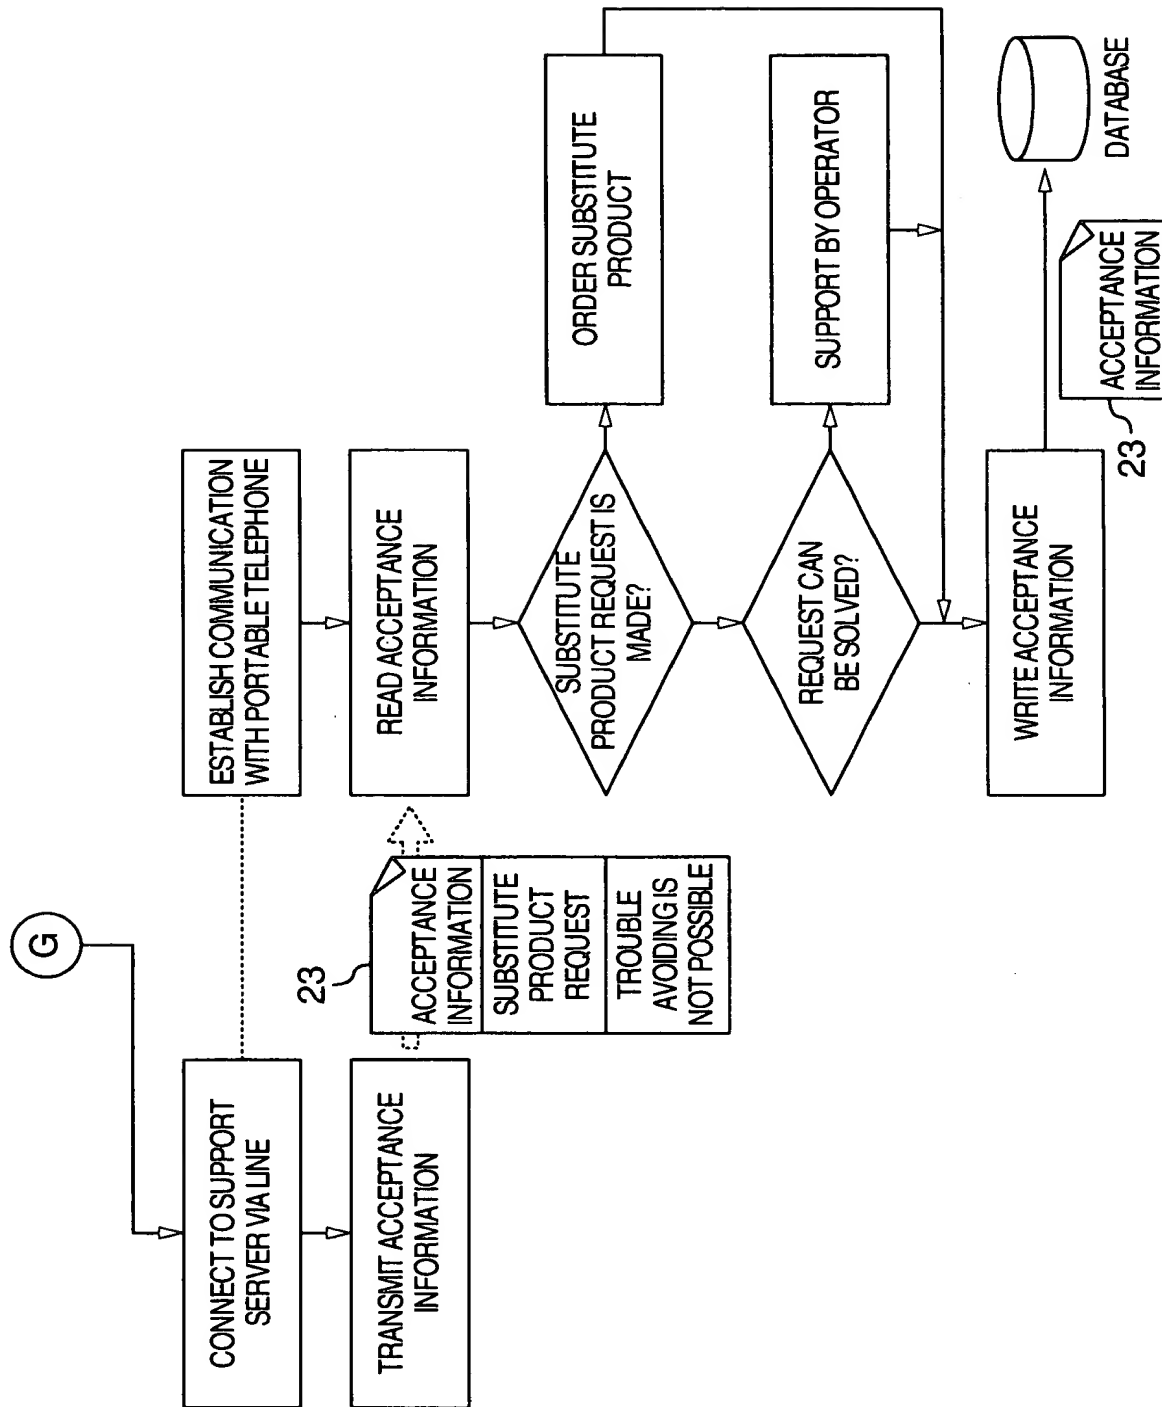



FIG. 8

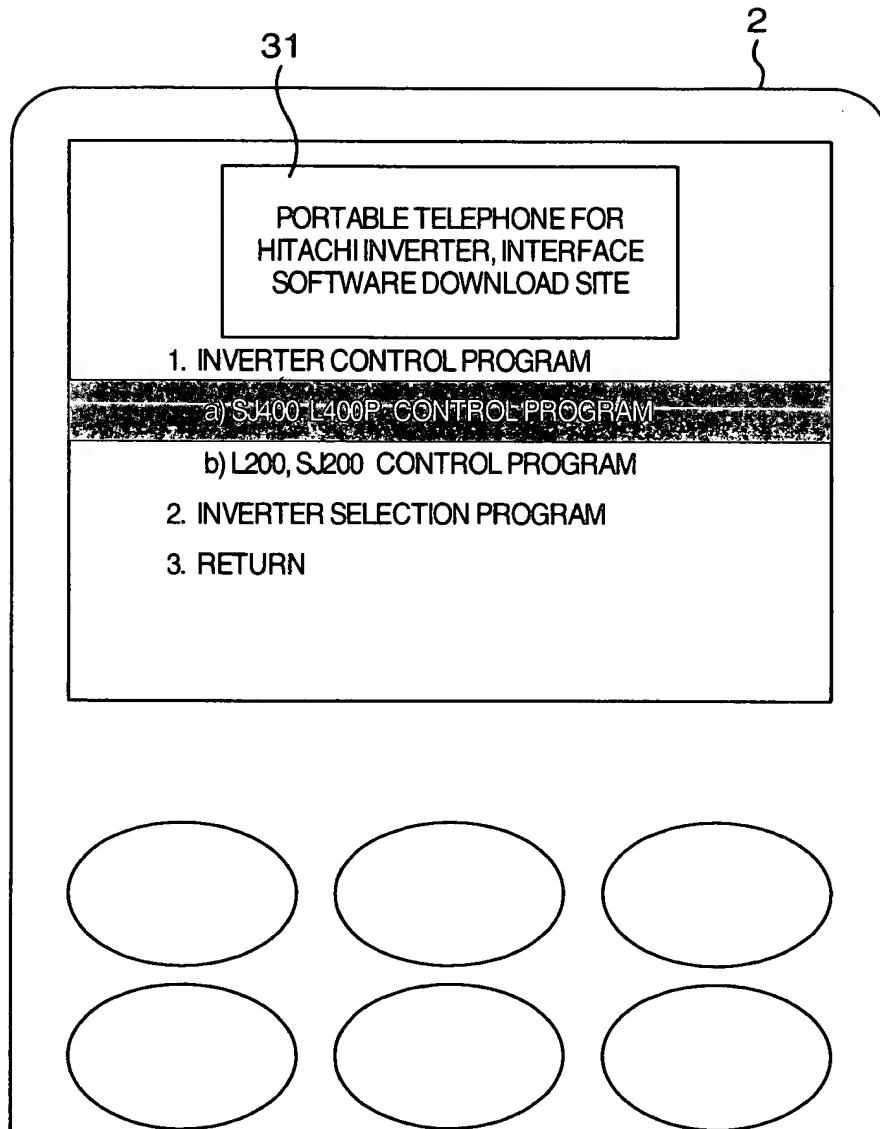

10941704-083001



FIG. 9

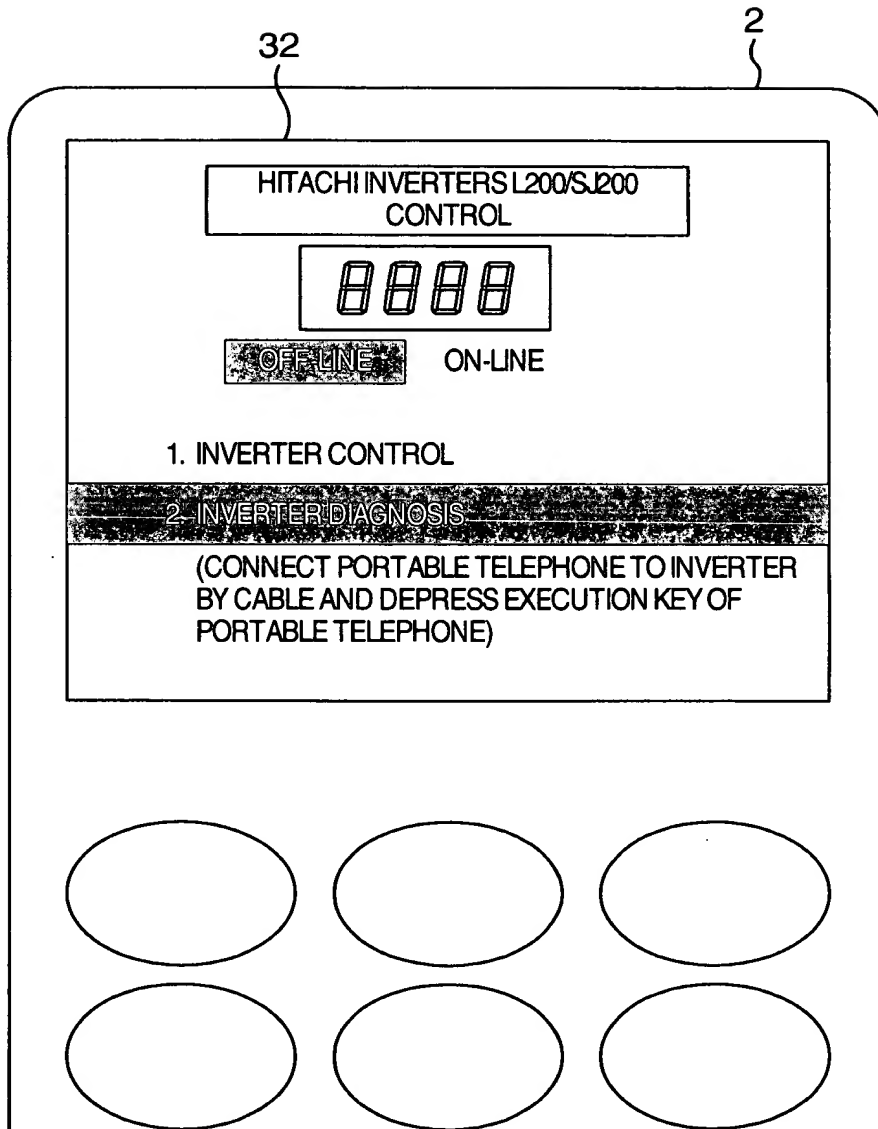

TOP SECRET 4024660

FIG. 10

INVERTER OF USER				DATABASE OF USER SUPPORT SERVER					
INVERTER INTERNAL INFORMATION				MANUFACTURE SALES HISTORICAL INFORMATION		ACCEPTANCE INFORMATION		TROUBLE SHOOTING INFORMATION	
TEMPORARILY UPDATE PARTIAL CONTENT				ONE ITEM PER ONE INVERTER		ONE ITEM PER ONE ACCEPTANCE		SOLVING METHOD PER ONE ITEM	
SERIAL NUMBER				SERIAL NUMBER		SERIAL NUMBER		SERIAL NUMBER	
NOT CHANGED				USAGE		SALES		SALES	
				PURCHASED DATA		SALES		SALES	
				MANUFACTURE LOT		MANUFACTURE		MANUFACTURE	
				MANUFACTURE NUMBER		MANUFACTURE		MANUFACTURE	
				REMARKS (RECALL AND SO ON)					
				MACHINE SORT CODE				MACHINE SORT CODE	
				SET PARAMETER		AT ACCEPTANCE			
				TRIP HISTORY		AT ACCEPTANCE			
				OPERATION HISTORY		AT ACCEPTANCE			
				ACCEPTANCE DATE					
				ACCEPTANCE SEAL					
				TRANSMITTED FILE CODE				FILE CODE	
								PREDICTED INQUIRY / ANSWER LIST	
								MANUAL	
				ACCEPTANCE HISTORY		PARAMETER CHANGED CONTENT			

24

23

22

21

11/16

FIG. 11A

33 2

HITACHI INVERTERS L200/SJ200  
CONTROL

0000

OFF-LINE ON-LINE

SERIAL NUMBER OF INVERTER USED BY  
CUSTOMER IS "MFG : 123-45567"

DISCONNECT CABLE FROM PORTABLE  
TELEPHONE, AND CONNECT TO USER  
SUPPORT CENTER

ADVANCE RETURN

FIG. 11B

34 2

HITACHI INVERTERS L200/SJ200  
CONTROL

0000

OFF-LINE ON-LINE

INVERTER USED BY CUSTOMER IS  
"MFG : 123-45567" 3  $\phi$  200V 0.2kW  
FAN (0.2 KW) SPEED CONTROL USE  
NAME OF CUSTOMER : HITACHI TECHNO PLANT (K. K)  
CONTACT DESTINATION : 03-3XXX-XXXX

ADVANCE RETURN

12/16

FIG. 12A

35

HITACHI INVERTERS L200/SJ200  
CONTROL

0000

OFF-LINE ON-LINE

OVERVOLTAGE (OV) TRIP DURING SPEED DOWN,  
PRESENTLY-SET REDUCTION TIME [1.5S] MAY BE  
CONCEIVED THAT THIS TIME IS SHORT FOR LOAD,  
SET REDUCTION TIME BY TWICE [3.0S] FOR TRIAL  
OPERATION?

1. YES

2. RETURN

FIG. 12B

36

HITACHI INVERTERS L200/SJ200  
CONTROL

0000

OFF-LINE ON-LINE

REDUCTION TIME [F03] IS SET FROM [1.5S] TO TWICE [3.0S]  
CONFIRM NO RISK BY ROTATING CONNECTED MOTOR,  
AND DEPRESS "RUN" BUTTON

1. YES

2. RETURN

FIG. 13A

37

SELECTION HITACHI  
INVERTER

THANK YOU FOR SELECTING HITACHI INVERTER

OFF-LINE ☒ ON-LINE

SELECT USAGE

1. FAN/PUMP

2. DRIVE/CART

3. HORIZONTAL CONVEYER

☒ ADVANCE    RETURN

FIG. 13B

38

SELECTION HITACHI  
INVERTER

THANK YOU FOR SELECTING HITACHI INVERTER

OFF-LINE ☒ ON-LINE

INVERTER FITTED TO YOUR USAGE : L200-022LFR

LIFETIME PREDICTED FROM OPERATION  
PATTERN: 7 YEARS

PRICE; ¥120,000

PURCHASE ORDER?

☒ YES    NO

FOOEBB"40214660

FIG. 14A

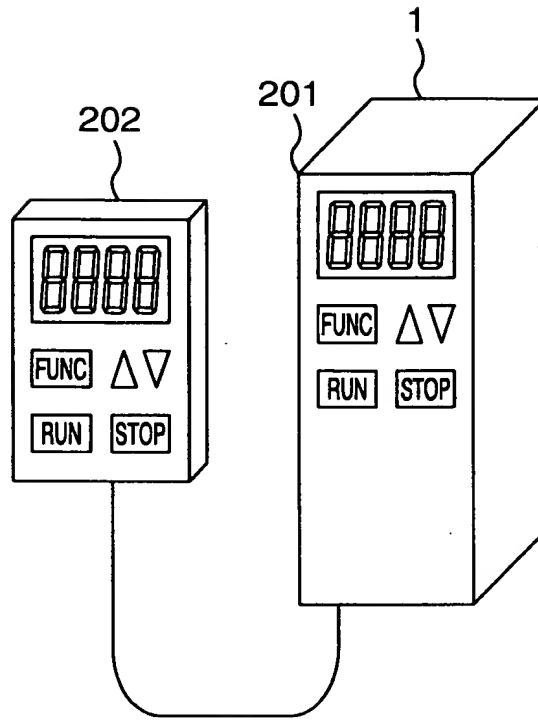


FIG. 14B

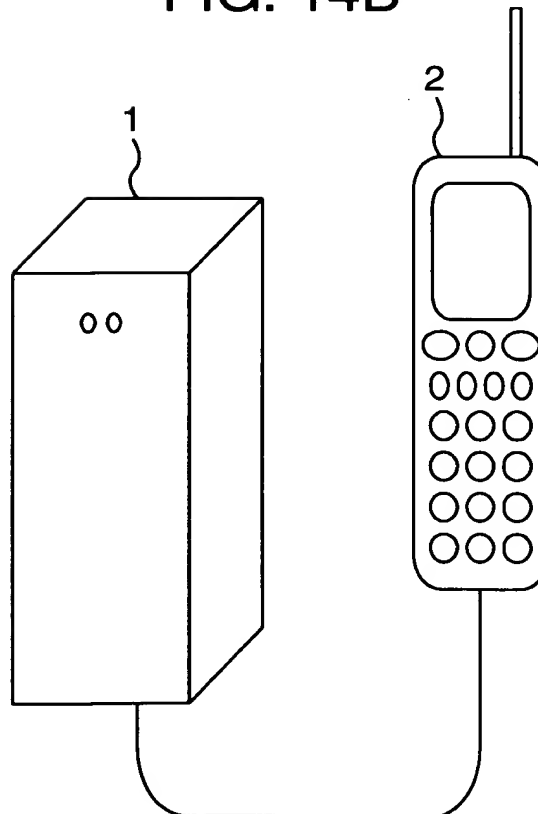


FIG. 15

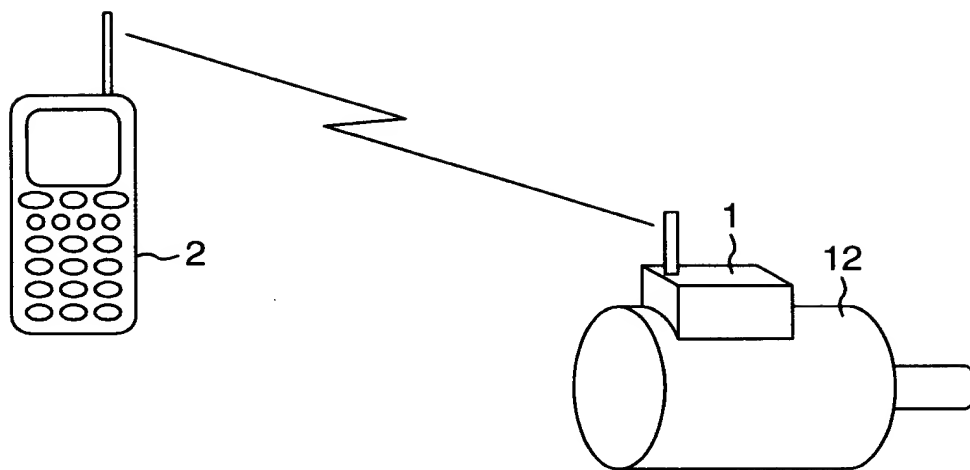


FIG. 16A

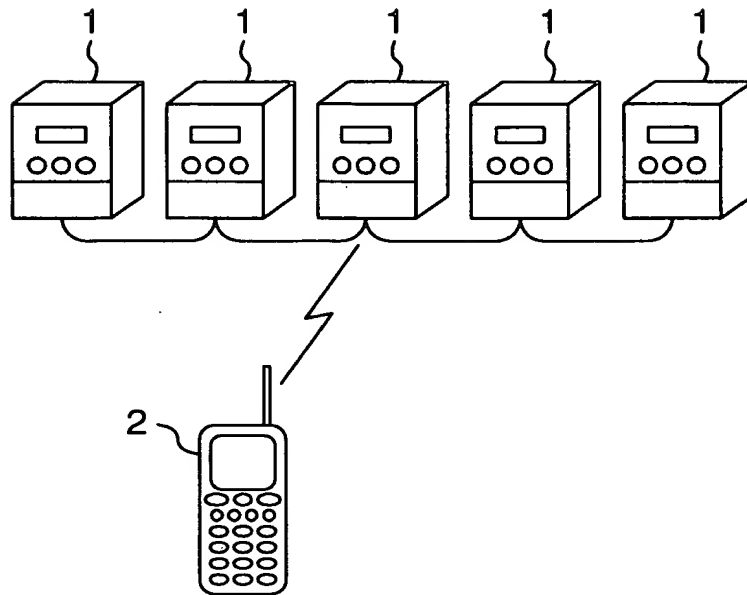


FIG. 16B

